



3M™ Oldham™ iTrans 2

Fixed gas detector



Characteristics

- Large Sensor Offering – Electrochemical, Catalytic and Infrared
- Non-Intrusive Calibration
- Smart Sensor
- HART (optional)
- RS-485 Modbus
- Programmable Relays (optional)
- Dual Gas Sensing (optional)

Certifications

- Oil and Gas Industry
- Offshore Drilling
- Utilities and Power
- Petrochemical Industry
- Municipal Water and
- Waste Treatment
- Food and Beverage Production

3M™ Oldham™ iTrans 2

Fixed gas detector



Sensors

- The iTrans 2 is available with sensors for most common gases including: Infrared, CO₂, Catalytic Bead Combustible and electrochemical sensors. It can support simultaneous detection from two sensors, either directly attached to the display, or remote sensors.

Versatile

- The iTrans 2 can be configured to meet nearly any application through its state-of-the-art features and options.
- Explosion-proof
- HART (optional)
- RS-485 Modbus
- Stainless Steel Enclosure (optional)
- Programmable Relays (optional)
- 3-wire, 4-wire Installations
- Dual Gas Sensing (optional)
- Remote Sensing (optional)
- Large Sensor Offering – Electrochemical, Catalytic and Infrared

Easy to use

- Smart Sensor
- Non-Intrusive Calibration
- Dual-channel split-screen LED display

Other features and benefits

Dual Gas Sensing The iTrans 2 can detect and display up to two gases on certain models. Both gas sensors may be mounted directly to the transmitter, or may be mounted remotely.

Wide Sensor Offering The iTrans 2 supports Electrochemical, Catalytic Bead and Infrared sensors. The iTrans 2 is available for most common industrial gases, allowing of standardization for your gas detection equipment.

Smart Sensors The iTrans 2's smart sensors come factory pre-calibrated and automatically send sensor information, such as sensor life, to the transmitter. A sensor life indicator is displayed immediately after each calibration.

Dual-channel split-screen LED display For optimum visibility in dark places

Non-Intrusive Calibration The iTrans 2's non-intrusive interface keys operate with a simple magnetic wand and allow for full transmitter configuration and calibration without opening the unit's explosion-proof housing.

Programmable Relays The microprocessor-controlled transmitters are capable of independent operation or multi-point system configuration. With optional on-board relays, the monitor has the added ability of stand-alone operation, activating alarms, horns or fans, and can also shut down a system without the need to wire back to a central control panel.

Multiple Wiring Options The iTrans 2 can be configured to meet almost any installation application. Common configurations includes:
3-Wire (4-20mA) Models - Allow for full utilization of the iTrans 2's features and options and can be used with all of the iTrans 2's sensors.
4-Wire (Digital ModBus) Models - Allows for full utilization of the iTrans 2's features and options and can be used with all of the iTrans 2's sensors.

HART™ Communication Protocol With the optional HART Communication Protocol, the iTrans 2 offers remote diagnostics, set-up or calibration by super - imposing a high-frequency current across the industry standard 4-20mA analog line.


Stainless Steel Enclosure An optional stainless steel enclosure for corrosive environments.

Ordering information

iTrans 2 offers a wide variety of sensor configurations and relay options for maximum flexibility and affordability. Use the following guide to select the options that best fit your monitoring needs and applications. Oldham recommends that a fixed system application survey be completed to help provide the most accurate assessment of your equipment requirements

iTrans 2 Base Part Number: iTrans 2-ABCDEFG (sensor options listed below) Magnetic calibration tool, and calibration cup are standard items with all iTrans 2 monitors.

Questions? Visit us at <http://gasdetection.3m.com>

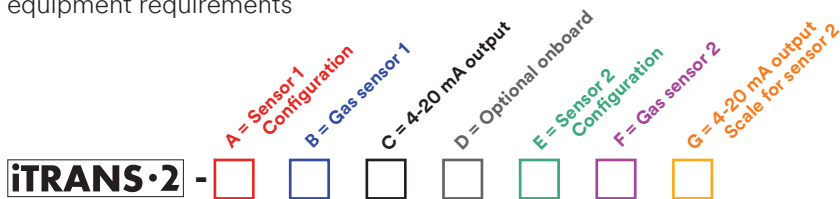

Example : iTrans 2 - 1C21241
 An iTrans 2 with an on-board LEL (4-20 mA scale 0-100) and remote mount H2S (4-20 mA scale 0-500) with optional relays and Modbus RTU

A	B	C	D	E	F	G
Sensor 1 Configuration	Gas sensor 1	4-20 mA Output Scale for Sensor 1	Optional on Board Relays	Sensor 2 Configuration	Gas sensor 2	4-20 mA Output Scale for Sensor 2
1 — Explosion proof/ On-Board	1 — CO ●	0 — 0-999	0 — No Relay Modules (Modbus)	0 — No sensor	1 — CO ●	0 — 0-999
2 — Explosion proof/ remote*	2 — NO ●	1 — 0-500	1 — With On-Board Relays (Modbus)	1 — Explosion proof/ On-Board**	2 — NO ●	1 — 0-500
3 — Non-hazardous remote/ Duct mount*	3 — NH ₃ ●	2 — 0-100	2 — No Relay Module (Hart)	2 — Explosion proof/ remote*	3 — NH ₃ ●	2 — 0-100
4 — Explosion proof/ On-Board with Splash Guard	4 — H ₂ S ●	3 — 0-50	3 — With On-Board Relays (Hart)	3 — Non-hazardous remote/ Duct mount*	4 — H ₂ S ●	3 — 0-50
5 — Explosion proof/ Remote with Splash Guard*	5 — SO ₂ ●	4 — 0-30		4 — Explosion proof/ On-Board with Splash Guard**	5 — SO ₂ ●	4 — 0-30
6 — Stainless Steel / On-Board	6 — NO ₂ ●	5 — 0-10		5 — Explosion proof / Remote with Splash Guard*	6 — NO ₂ ●	5 — 0-10
7 — Stainless Steel / Remote*	7 — Cl ₂ ●	6 — 0-2		7 — Stainless Steel / Remote*	7 — Cl ₂ ●	6 — 0-2
8 — Explosion proof / Dual sensors / Single remote enclosure**	8 — ClO ₂ ●	7 — 0-1		8 — Explosion proof / Dual sensors / Single remote enclosure**	8 — ClO ₂ ●	7 — 0-1
	9 — HCN ●	8 — 0-20			9 — HCN ●	8 — 0-20
	A — O ₂ ●	9 — 0-200			A — O ₂ ●	9 — 0-200
	B — Methane by LEL (catalytic) ◆	A — 0-5.00			B — Methane by LEL (catalytic) ◆	A — 0-5.00
	C — Pentane by LEL (catalytic) ◆	B — 0-0.50			C — Pentane by LEL (catalytic) ◆	B — 0-0.50
	D — CO/null H ₂ ●				D — CO/null H ₂ ●	
	F — HCl ●				F — HCl ●	
	K — PH ₃ ●				K — PH ₃ ●	
	L — H ₂ ●				L — H ₂ ●	
	V — CO ₂ (0-5 %) ▲				V — CO ₂ (0-5 %) ▲	
	W — CO ₂ (0-100 %) ▲				W — CO ₂ (0-100 %) ▲	
	X — CO ₂ (0-0.5 %) ▲				X — CO ₂ (0-0.5 %) ▲	


* Remote sensor maximum distance = 200m
 ** Dual On-Board are CSA certified only.
 Consult factory for availability, additional gases, ranges and certification information.

- = electrochemical
- ▲ = IR
- ◆ = catalytic

3M™ Oldham™ iTrans 2

Fixed gas detector

Accessories	Part number	Image code
By-Pass / Flow-thru Kit	P/N 77014579	a
Splash guard / remote Cal Cup for Toxic, O ₂ , and LEL	P/N. 77015303	b
iTrans 2 Calibration Wand	P/N. 77024065	c
iTrans 2 Splash guard	P/N. 77023588	d
iTrans 2 Calibration Cup	P/N. 77023513	e

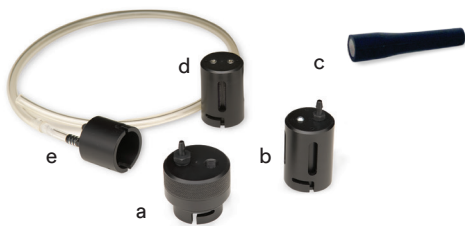

Measuring ranges

Combustible Gases	0-100% LEL in 1% increments
Hydrogen	0-999 ppm in 1 ppm increments
Oxygen	0-30% by Volume in 0.1% increments
Ammonia	0-500 ppm in 1 ppm increments
Carbon Monoxide	0-999 ppm in 1 ppm increments
Hydrogen Sulfide	0-500 ppm in 1 ppm increments
Sulfur Dioxide	0.2-99.9 ppm in 0.1 ppm increments
Hydrogen Cyanide	0.2-30 ppm in 0.1 ppm increments
Hydrogen Chloride	0.2-30 ppm in 0.1 ppm increments
Phosphine	0-1 ppm in 0.01 ppm increments
Nitrogen Dioxide	0.2-99.9 ppm in 0.1 ppm increments
Nitric Oxide	0-999 ppm in 1 ppm increments
Chlorine	0.2-99.9 ppm in 0.1 ppm increments
Chlorine Dioxide	0-100% by Volume in 1% increments
Carbon Dioxide	0-100% by Volume in 1% increments
Carbon Dioxide	0-0.5% by Volume in 0.01% increments
Carbon Dioxide	0-5% by Volume in 0.01% increments

Technical specifications

Sensors	Combustible Gases: Catalytic, Infrared Toxic / Oxygen: Electrochemical, Infrared (CO ₂)
Warranty	2 years on electronics 3 years on infrared sensors (CO ₂)
from date of shipment	2 years on catalytic (LEL), CO and H ₂ S sensors 18 months on O ₂ sensors 12 months on other sensors
Detected Gases	See Ordering Guide
Material	Epoxy Coated Aluminium or 316 Stainless Steel
Display	Dual-channel split-screen LED display (4 digit, 7 segment arrangement per channel) provides simultaneous display of one or two gases.
Input voltage	12-28VDC operating range (24VDC typical)
Power Consumption	150mA@24VDC (Electrochemical sensor) 250mA@24VDC (Combustible gases catalytic) 0.8A peak (single gas) 170mA@24VDC (Infrared) 0.5A peak (single gas) 350mA@24VDC (Combined catalytic/Infrared) 1,2A peak (two gas)
Ingress Protection	NEMA 4X, IP66
Response Time (catalytic methane)	T50: < 10 seconds T90: < 30 seconds
Humidity Range	10-90% RH (non-condensing), typical (sensor specific)
Temperature range	-40°C to +75°C (-40°F to +167°F)
Dimensions	127 × 153 × 129 mm (5.0" × 6.0" × 5.1"), 2.9 Kg (6.4 lbs)
Cable	3-wire or 4-wire
Maximum Cable Loop	15 Ohm (3-wire configs) 10 Ohm (4-wire configs)
Output Signal:	Standard: 4-20mA (source) Optional: RS-485 Modbus (9600 baud) Optional: HART Protocol
Alarm relays (opt)	3 alarm relays (5 / Two user-programmable relays, SPST, N.O. Amps at 30VDC) One fault relay, SPST, N.C.
Homologations	Class I, Div 1, Groups B, C, D Ex d IIB + H2 T5 AEx d IIB + H2T5 ⁽¹⁾
Sensor Specific	Class I, Div 2, Groups A, B, C, D ⁽²⁾ ATEX and IECEx II 2G - Ex db IIB + H2 T5 Gb ⁽¹⁾ II 3G - Ex na IIC T5 Gc ⁽²⁾ China GYB15.1621X - Ex d IIB + H2 T5 Gb GB15322.1-2003 Fire protection

(1) Combustible gases, Hydrogen, Oxygen, Carbon Monoxide, Hydrogen Sulfide, Sulfur Dioxide, Hydrogen Cyanide, Phosphine, Nitrogen Dioxide, Nitric Oxide, Carbon Dioxide

(2) Ammonia, Hydrogen Chloride, Chlorine, Chlorine Dioxide.

As an ISO 9001 & ISO 14001 approved company, OLDHAM quality assurance programmes demand the continuous assessment and improvement of all OLDHAM products. Information in this leaflet could thus change without notification and does not constitute a product specification. Please contact OLDHAM or their representative if you require more details.

AMERICAS - Texas (USA)
4055 Technology Forest Blvd.
The Woodlands, TX 77381
Tel.: +1-800-247-7257
Fax: +1-281-292-2860

EMEA
ZI Est. Rue Orfila,
CS 20417
62027 ARRAS CEDEX, France
Tel.: +33-3-21-60-80-80
Fax: +33-3-21-60-80-00

ASIA PACIFIC
290 Guiqiao Road
Pudong, Shanghai 201206
People's Republic of China
Tel.: +86-21-3127-6373
Fax: +86-21-3127-6365



Copyright © 2018 3M, 3M Gas & Flame Detection. All rights reserved.
gasdetection.3m.com. GF-300174F-EN